


SR1402

Shaft dia. $\phi 14$ Lead 2mm

Ct7&Ct10

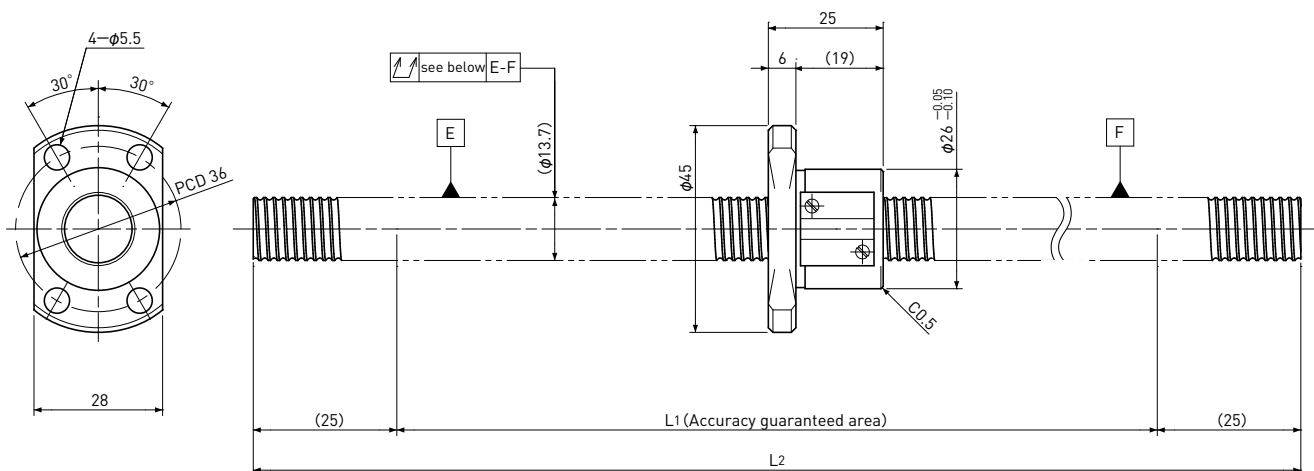

Unit: mm

Ball Screw Specifications	
Ball size	$\phi 1.5875$
Number of thread	1
Thread direction	Right
Shaft root dia.	$\phi 12.6$
Number of circuit	3.7×1
Shaft, Nut material	SCM415H
Surface hardness	HRC58~62 (Thread area)
Anti-rust treatment	Anti-rust oil

Unit: mm

Ball Screw Model	Travel	Grade	Shaft length		Lead accuracy		Total Run-out \nearrow	Axial play	Preload Torque Nm	Basic Load Rating N	
			L ₁	L ₂	Travel deviation e_p	Variation V_{300}				Dynamic C _a	Static C _{0a}
SR1402-500R500C7	425	Ct7	450	500	± 0.07	0.05	0.080	~ 0.020	—	3200	7500
SR1402-500R500C10	425	Ct10	450	500	± 0.31	0.21	0.160	~ 0.050			

Note) Please designate end-journal profile with your sketch.