


SSR1002

Stainless

Shaft dia. $\phi 10$ Lead 2mm

Ct7&Ct10

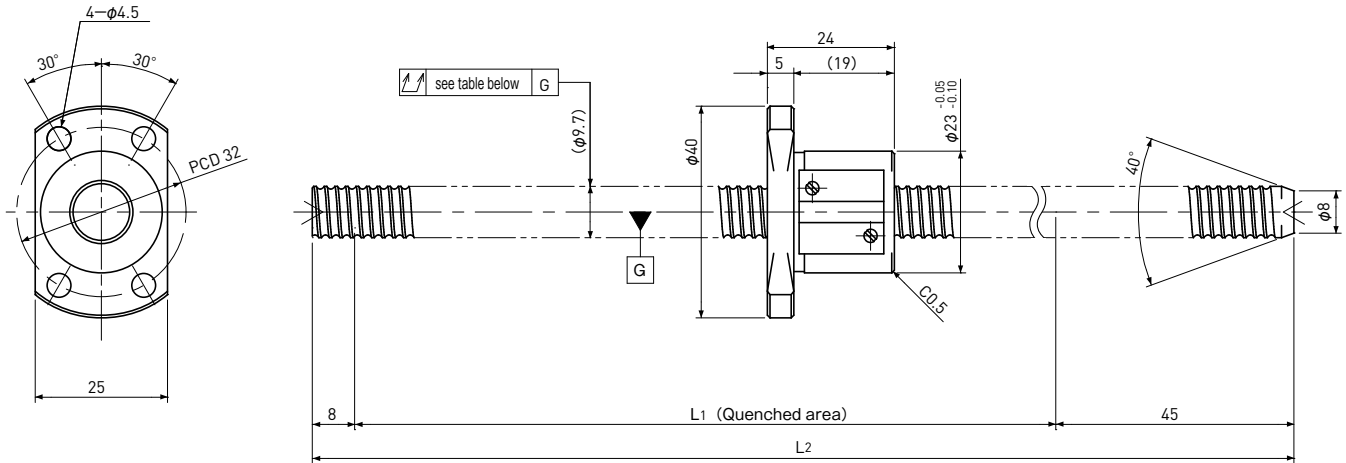

Unit: mm

Ball Screw Specifications	
Ball size	$\phi 1.5875$
Number of thread	1
Thread direction	Right
Shaft root dia.	$\phi 8.6$
Number of circuit	3.7×1
Shaft, Nut material	SUS440C
Surface hardness	HRC55~ (Thread area)
Anti-rust treatment	Anti-rust oil

Unit: mm

Ball Screw Model	Travel	Grade	Shaft length		Lead accuracy		Total Run-out	Axial play	Preload Torque Nm	Basic Load Rating N	
			L ₁	L ₂	Travel deviation e_p	Variation V_{300}				Dynamic C_a	Static C_{0a}
SSR1002-400C7	320	Ct7	347	400	± 0.06	0.05	0.080	~ 0.020	—	2200	4000
SSR1002-400C10	320	Ct10	347	400	± 0.24	0.21	0.160	~ 0.050			

Note) Please designate end-journal profile with your sketch.