


# SSRT0802

Stainless  
Shaft dia.  $\phi 8$  Lead 2mm


Ct7&Ct10

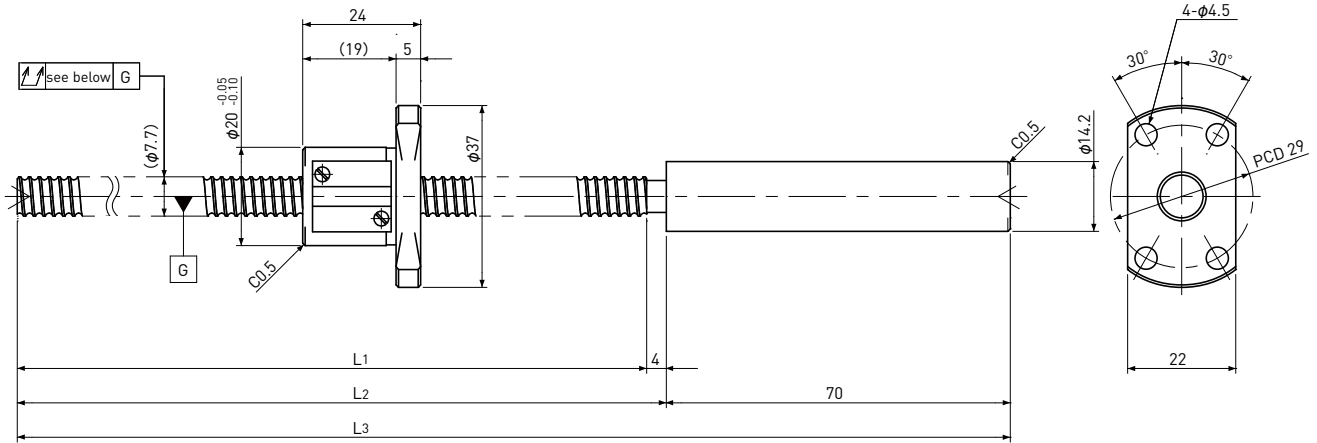

Unit : mm


Ball Screw Specifications		
Ball size		$\phi 1.5875$
Number of thread		1
Thread direction		Right
Shaft root dia		$\phi 6.6$
Number of circuit		$3.7 \times 1$
Material	Shaft	SUS440C+SUS303
	Nut	SUS440C
Surface hardness		HRC55~ (Thread area)
Anti-rust treatment		Anti-rust oil

End-journal profile Supported-side

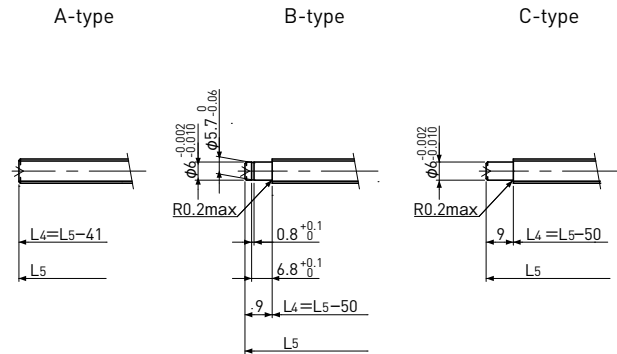

L4: Thread length after end-journal machining.  
L5: Total length after end-journal machining.

Fixed-side

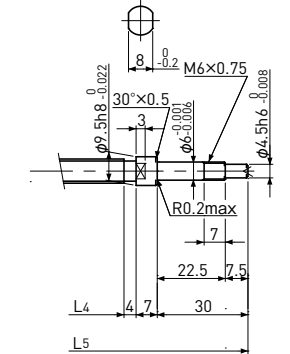

Support-unit Recommendation	Supported-side	MSU-6CS/6GS
	Fixed-side	MSU-6C/6G

D-type : Other than the above.

Unit : mm

Ball Screw Model	Travel	Grade	Shaft length			Lead accuracy		Total Run-out	Axial play	Preload Torque Nm	Basic Load Rating N	
			L1	L2	L3	Travel deviation $e_p$	Variation $V_{300}$				Dynamic $C_a$	Static $C_{oa}$
SSRT0802-196R270C7	170	Ct7	196	200	270	$\pm 0.03$	—	0.080	~0.020	—	1950	3100
SSRT0802-356R430C7	330	Ct7	356	360	430	$\pm 0.06$	0.05	0.120				
SSRT0802-196R270C10	170	Ct10	196	200	270	$\pm 0.13$	—	0.160	~0.050			
SSRT0802-356R430C10	330	Ct10	356	360	430	$\pm 0.24$	0.21	0.240				

Note ) Please refer to page A287 for order code of end-journal machining.