NSR1002 | Shaft dia. ϕ10 Lead2mm | Ct7

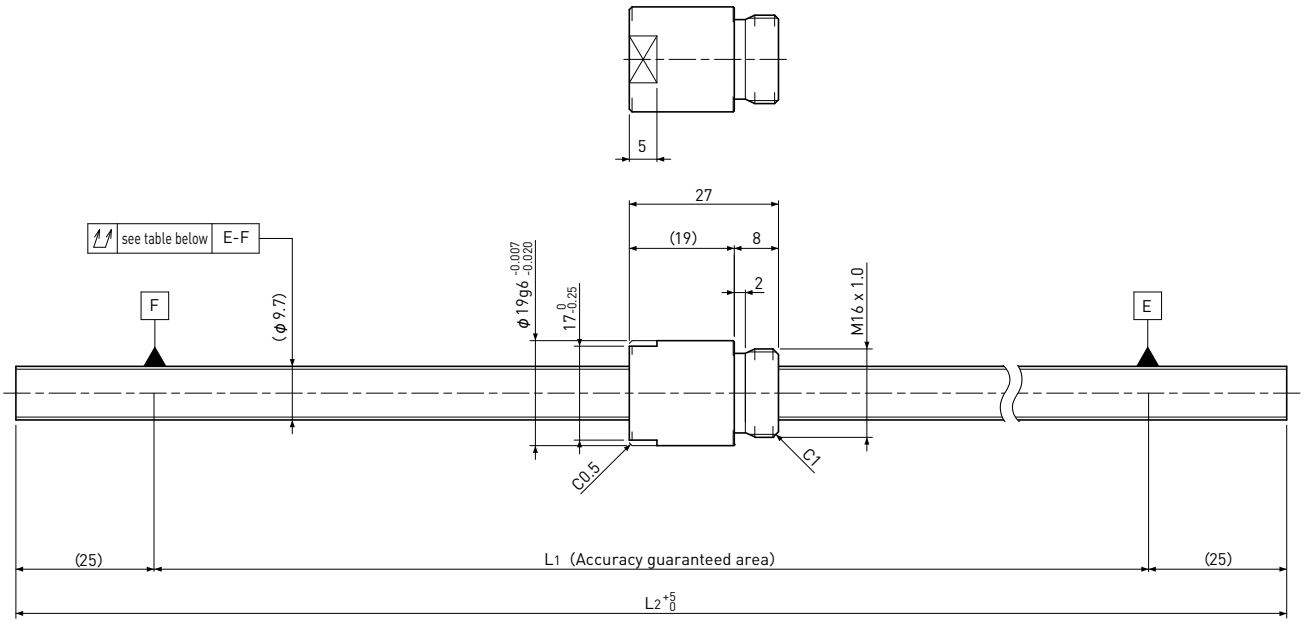

Unit : mm

Ball Screw Specifications	
Thread direction	Right
Shaft, Nut material	SCM415H
Surface hardness	HRC58～62 (Thread area)
Anti-rust treatment	Anti-rust oil

Unit : mm

Ball Screw Model	Travel	Grade	Shaft length		Lead accuracy		Total Run-out	Axial play	Preload Torque Nm	Basic Load Rating N	
			L_1	L_2	Travel deviation e_p	Variation V_{300}				Dynamic Ca	Static Coa
NSR1002-400R400C7	320	Ct7	350	400	±0.060	0.052	0.080	～0.020	—	2050	3650

Note) Please designate end-journal profile with your sketch.