


Single Nut with Flange

Backlash type

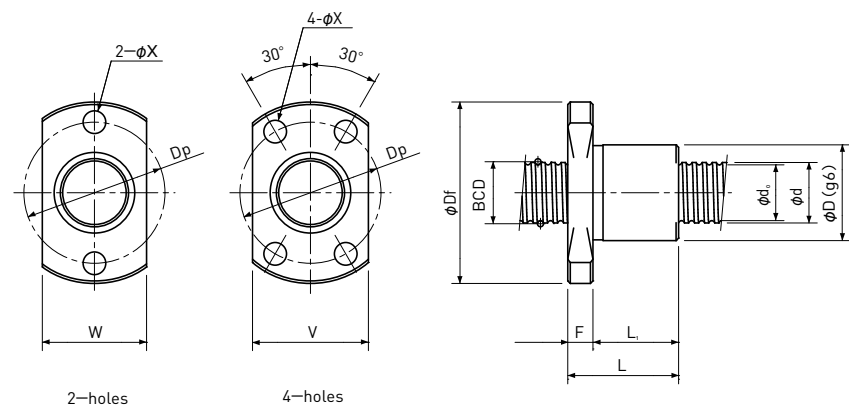

Unit:mm

Model number	Shaft nominal dia. d	Lead	BCD	Basic Load Rating N		Nut dimension										Model number
				Dynamic Ca	Static Coa											
NSRF0401	4	1	4.15	450 / -	600 / -		11	23	18	14	4	—	15	17	3.4	NSRF0401
NSRF0601	6	1	6.20	560 / -	950 / -		12	24	20	14	6	—	16	18	3.4	NSRF0601
NSRF0602	6	2	6.20	770 / -	1150 / -		12	24	21	15	6	—	16	18	3.4	NSRF0602
NSRF0801	8	1	8.20	650 / -	1300 / -		16	28	20	14	6	—	19	22	3.4	NSRF0801
NSRF0802	8	2	8.30	1300 / -	2300 / -		16	28	21	15	6	—	19	22	3.4	NSRF0802
NSRF0805	8	5	8.30	1850 / -	3000 / -		16	28	28.5	22.5	6	—	19	22	3.4	NSRF0805
NSRF1002	10	2	10.30	2050 / -	3650 / -		19	36	25	19	6	—	23	28	4.5	NSRF1002
NSRF1004	10	4	10.30	3000 / -	5200 / -		19	36	26	20	6	—	23	28	4.5	NSRF1004
NSRF1202	12	2	12.30	2250 / -	4550 / -		24	40	26	20	6	—	26	32	4.5	NSRF1202
NSRF1204	12	4	12.30	4100 / -	7400 / -		24	40	27	21	6	—	26	32	4.5	NSRF1204

Note 1)NSRF0401 is not specified in DIN standard, therefore conforms to the ISO standard.

Basic Load Rating N	
Dynamic Ca	Static Coa
1000 / 640	3300 / 1650

Preload type

Backlash type