


DDACL □28 / NEMA 11

Shaft dia. $\phi 6$

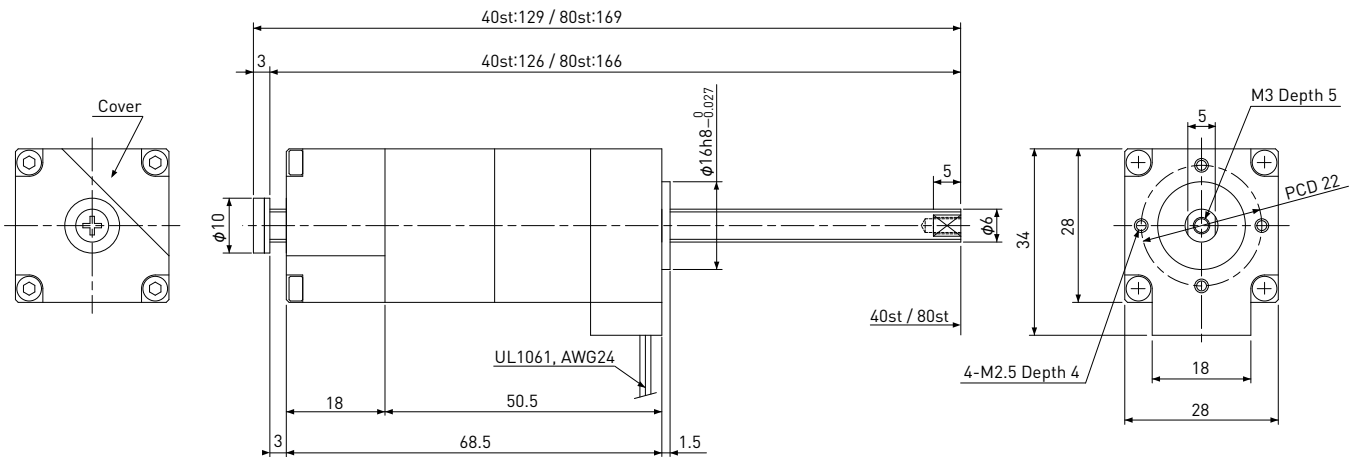

Motor lead wire	
A	Black
\bar{A}	Green
B	Red
\bar{B}	Blue

UL1061, AWG24(310mm)

Recommended Drivers	SD4030B3
---------------------	----------

Note) Refer to page P164 for connection diagram of recommended Drivers.

Specifications				
	DDACL28-G01 040/080	DDACL28-G02 040/080	DDACL28-R01 040/080	DDACL28-R02 040/080
Drive Screw type	Precision Ball Screw		Rolled Ball Screw	
Screw lead	1mm	2mm	1mm	2mm
Travel	40mm / 80mm		40mm / 80mm	
Repeatability	$\pm 0.005\text{mm}$		$\pm 0.010\text{mm}$	
Lost Motion	0.010mm		0.020mm	
Permissible Speed	20mm/sec	40mm/sec	20mm/sec	40mm/sec
Acceleration & deceleration time	Min. 0.2sec		Min. 0.2sec	
Thrust Force	50N	25N	50N	25N
Mass	Travel 40mm:230g Travel 80mm:240g		Travel 40mm:230g Travel 80mm:240g	

Motor Specifications	
Basic step angle	1.8°
Driving method	2-phase Bi-polar
Rated Voltage	DC 3.8 V
Rated current	0.67 A/phase
Winding resistance	5.6 Ω
Winding inductance	5.3mH
Insulation Class	Class B (130°C)
Operating Temp.	0~40°C (No Condensation)

Precautions

- Non-Captive type does not have an anti-rotating device. External anti-rotating devices should be set up when usage. Radial load can not be applied on Captive type. For more detail, please see page S105.
- Specifications above are reference value measured in vertical position at virgin condition.
- Sensor is not built in this standard design. Please ask KSS if necessary