


Single Nut with M-thread


Backlash type/Preload type

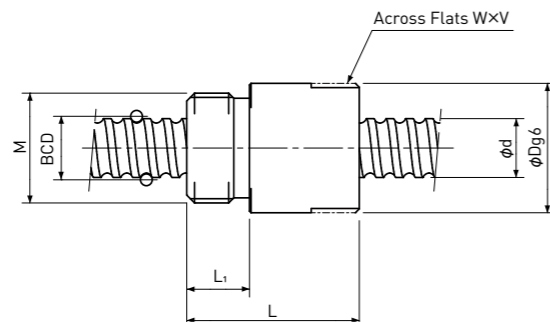

Unit: mm

Model number	Shaft nominal dia. d	Lead	BCD	Basic Load Rating N		Nut dimension						Model number
				Dynamic Ca	Static Coa	D	L	L ₁	Across Flats width W	Across Flats length V	M	
NSG0401	4	1	4.15	450 / 450	600 / 600	11	19	5	10	3	M9x0.75	NSG0401
NSG0601	6	1	6.20	560 / 560	950 / 950	12	20	6	10	3	M10x1.0	NSG0601
NSG0602	6	2	6.20	770 / 770	1150 / 1150	12	21	6	10	3	M10x1.0	NSG0602
NSG0801	8	1	8.20	650 / 650	1300 / 1300	16	22	8	14	5	M14x1.0	NSG0801
NSG0802	8	2	8.30	1300 / 1300	2300 / 2300	16	23	8	14	5	M14x1.0	NSG0802
NSG0805	8	5	8.30	1850 / 1150	3000 / 1500	16	30.5	8	14	5	M14x1.0	NSG0805
NSG1002	10	2	10.30	2050 / 2050	3650 / 3650	19	27	8	17	5	M16x1.0	NSG1002
NSG1004	10	4	10.30	3000 / 1800	5200 / 2600	19	28	8	17	5	M16x1.0	NSG1004
NSG1202	12	2	12.30	2250 / 2250	4550 / 4550	24	28	8	22	5	M20x1.0	NSG1202
NSG1204	12	4	12.30	4100 / 2500	7400 / 3700	24	29	8	22	5	M20x1.0	NSG1204



Note 1) NSG0401 is not specified in DIN standard, therefore conforms to the ISO standard.
 Note 2) Flange type Nut is available as an option.



Precision Ball Screws

Single Nut with M-thread

Backlash type/Preload type

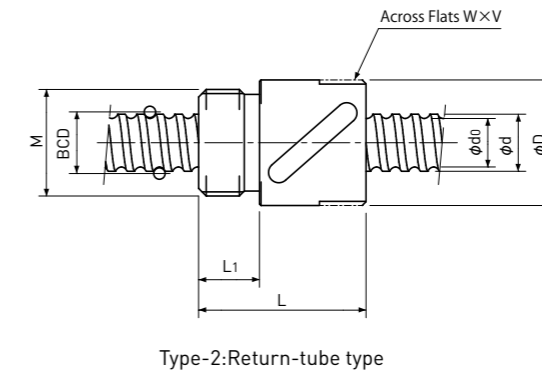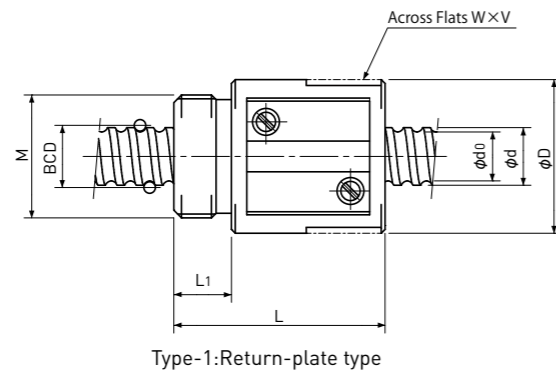

Unit : mm

Ball Nut Model number	Shaft nominal dia. d	Lead	Ball size	BCD	Lead angle	Root dia. d ₀	Number of Circuit	Basic Load Rating N		Nut Rigidity N/μm	Nut dimension						Ball Nut Model number	
								Dynamic Ca	Static Coa		Nut type	D	L	L ₁	Across Flats width W	Across Flats length V		M
MS 0401 B	4	1	0.8	4.15	4° 23'	3.3	3.7x1	560 / 350	790 / 400	54 / 45	1	11	17	4	10	6	M9x0.75	MS 0401 B
MS 0602 A	6	2	1.0	6.20	5° 52'	5.1	2.7x1	750 / 470	1200 / 590	58 / 49	1	16.5	22	8	14	4	M14x1.0	MS 0602 A
MS 0801.5 B	8	1.5	1.0	8.20	3° 20'	7.1	3.7x1	1100 / 700	2200 / 1100	99 / 83	1	16.5	24	8	14	5	M14x1.0	MS 0801.5 B
MS 0802 B	8	2	1.5875	8.30	4° 23'	6.6	3.7x1	2400 / 1550	4100 / 2100	111 / 94	1	20	27.5	7.5	18	5	M16x1.0	MS 0802 B
MS 0802.5 T(1)	8	2.5	1.5875	8.00	5° 41'	6.3	3.5x1	2300 / -	3900 / -	102 / -	2	16.5	22	8	14	4	M14x1.0	MS 0802.5 T(1)
MS 0802.5 T(2)	8	2.5	1.5875	8.00	5° 41'	6.3	3.5x1	2300 / -	3900 / -	102 / -	2	17.5	25.5	7.5	15	4	M15x1.0	MS 0802.5 T(2)
MS 0803 A	8	3	2.0	8.30	6° 34'	6.2	2.7x1	2600 / 1650	4200 / 2100	85 / 70	1	20	28.5	7.5	18	5	M16x1.0	MS 0803 A
MS 0804 T	8	4	1.5875	8.00	9° 03'	5.9	2.5x1	1750 / -	2800 / -	75 / -	2	16.5	24	8	14	4	M14x1.0	MS 0804 T
MS 0805 A	8	5	1.5875	8.30	10° 51'	6.6	2.7x1	1850 / 1150	3000 / 1500	82 / 67	1	18	32.5	7.5	16	5	M15x1.0	MS 0805 A

Basic Load Rating N		Nut Rigidity N/μm
Dynamic Ca	Static Coa	
1000 / 640	3300 / 1650	164 / 138
		Preload type
		Backlash type

Note 1) The diameter of one of the Screw Shaft ends must be less than the Screw Shaft Root diameter, otherwise Ball Nut cannot be installed.

Note 2) Ball Nut dimension is without seal at the both ends. All type of Ball Nuts cannot equip with seals.

Note 3) The Rigidity values shown in the table are theoretical values of Ball Nut Rigidity calculated from the amount of Elastic Displacement under the following conditions.

Backlash type ; Apply the Axial load equivalent to 30% of the Basic Dynamic Load Rating Ca.

Preload type ; Apply the Preload equivalent to 5% of the Basic Dynamic Load Rating Ca.

For Axial load or Preload condition other than the above,

see the formula in page A823 or page A824, you can calculate Rigidity using this formula.

Note 4) All models are Right-hand Screw. If Left-hand Screw is required, please ask KSS representative.



Note 5) Across Flats or drill hole is available on the Ball Nut for the convenience of assembly. Please ask KSS representative.

Note 6) Basic Load Rating and Rigidity for Backlash type and Preload type are described in the same cell.

Precision Ball Screws

Single Nut with M-thread

Backlash type/Preload type

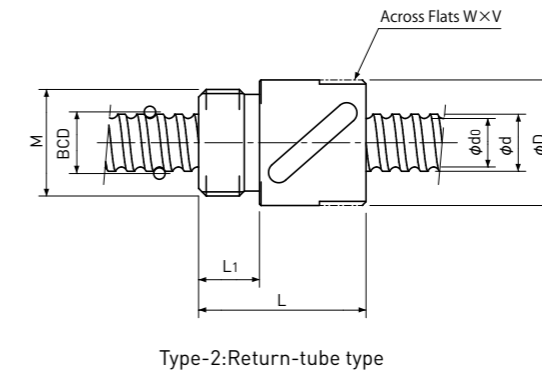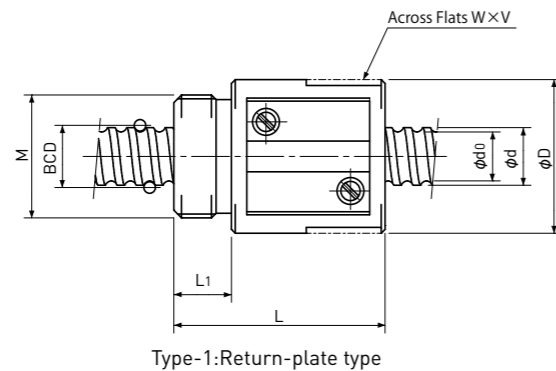

Unit: mm

Ball Nut Model number	Shaft nominal dia. d	Lead	Ball size	BCD	Lead angle	Root dia. d ₀	Number of Circuit	Basic Load Rating N		Nut Rigidity N/μm	Nut dimension						Ball Nut Model number	
								Dynamic Ca	Static Coa		Nut type	D	L	L ₁	Across Flats width W	Across Flats length V		M
MS 1002 B	10	2	1.5875	10.30	3°32'	8.6	3.7x1	2700 / 1750	5300 / 2700	134 / 112	1	23	27.5	7.5	21	5	M17x1.0	MS 1002 B
MS 1202 B	12	2	1.5875	12.30	2°58'	10.6	3.7x1	3000 / 1900	6400 / 3200	156 / 132	1	25	30	10	23	5	M20x1.0	MS 1202 B
MS 1204 T	12	4	2.381	12.30	5°55'	9.8	2.5x1	3900 / —	7000 / —	113 / —	2	25.5	34	10	23	5	M20x1.0	MS 1204 T
MS 1402 B	14	2	1.5875	14.30	2°33'	12.6	3.7x1	3200 / 2000	7500 / 3800	176 / 148	1	26	30	10	23	5	M22x1.5	MS 1402 B
MS 1404 B	14	4	2.381	14.30	5°05'	11.8	3.7x1	5700 / 3600	11600 / 5800	187 / 157	1	30	38	10	27	8	M25x1.0	MS 1404 B

Basic Load Rating N		Nut Rigidity N/μm
Dynamic Ca	Static Coa	
1000 / 640	3300 / 1650	164 / 138
		Preload type
		Backlash type

Note 1) The diameter of one of the Screw Shaft ends must be less than the Screw Shaft Root diameter, otherwise Ball Nut cannot be installed.

Note 2) Ball Nut dimension is without seal at the both ends. All type of Ball Nuts cannot equip with seals.

Note 3) The Rigidity values shown in the table are theoretical values of Ball Nut Rigidity calculated from the amount of Elastic Displacement under the following conditions.

Backlash type ; Apply the Axial load equivalent to 30% of the Basic Dynamic Load Rating Ca.

Preload type ; Apply the Preload equivalent to 5% of the Basic Dynamic Load Rating Ca.

For Axial load or Preload condition other than the above,

see the formula in page A823 or page A824, you can calculate Rigidity using this formula.

Note 4) All models are Right-hand Screw. If Left-hand Screw is required, please ask KSS representative.

Note 5) Across Flats or drill hole is available on the Ball Nut for the convenience of assembly. Please ask KSS representative.

Note 6) Basic Load Rating and Rigidity for Backlash type and Preload type are described in the same cell.